

Fast Fill DGE temperature compensated	26.1	34.8	40.3
Volume	300 Liter (10.59 ft ³)	400 Liter (14.12 ft ³)	463 Liter (16.35 ft ³)
GGE	26.3	35.0	40.6
DGE	23.1	30.8	35.7
Service Pressure	3,600 PSI (250 Bar)	3,600 PSI (250 Bar)	3,600 PSI (250 Bar)
Diameter	23.0 in	23.0 in	23.0 in
Length	62.5 in	82.4 in	90.0 in
Weight	305 lbs	370 lbs	390 lbs
Mount	strap	neck	strap

Gasoline and Diesel equivalence determined @ 24.8 MPa (3,600 psi) and 21°C Industry Average (IA) = 4.82 lb/GGE, DGE = .88*GGE IA

23" diameter Type 3 Storage Cylinders

	28.6	40.6	46.2	49.2
Fast Fill DGE temperature compensated				
Volume	327 Liter (11.55 ft ³)	465 Liter (16.42 ft ³)	530 Liter (18.72 ft ³)	563 Liter (19.88 ft ³)
GGE	28.7	40.8	46.5	49.4
DGE	25.3	35.9	40.9	43.5
Service Pressure	3,600 PSI (250 Bar)	3,600 PSI (250 Bar)	3,600 PSI (250 Bar)	3,600 PSI (250 Bar)
Diameter	25.0 in	25.0 in	25.0 in	25.0 in
Length	60.0 in	80.0 in	90.0 in	93.5 in
Weight	310 lbs	413 lbs	465 lbs	484 lbs
Mount	neck	neck	neck	neck

Gasoline and Diesel equivalence determined @ 24.8 MPa (3,600 psi) and 21°C Industry Average (IA) = 4.82 lb/GGE, DGE = .88*GGE IA

25" diameter Type 3 Storage Cylinders




Type 3 Storage Cylinders

Superior Storage

- Improved fast-fill
- Zero permeation due to forged and flow formed liner

Applications for

- Hydrogen
- Helium
- Carbon Monoxide

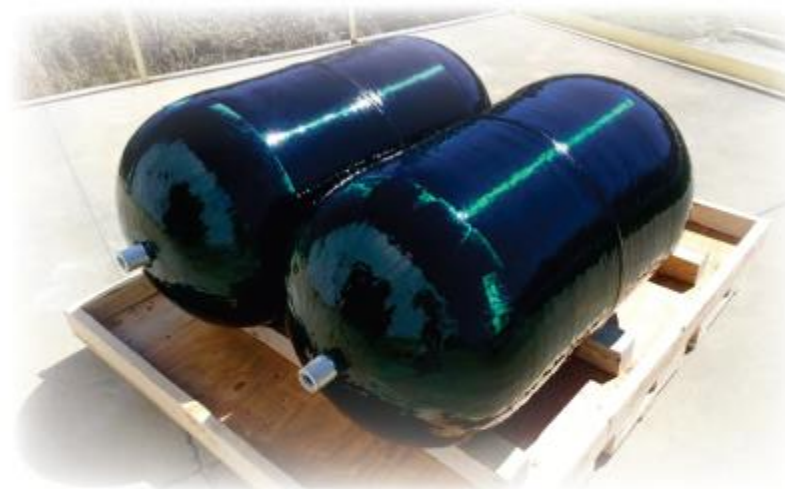

350 bar/5,075 psi service pressure

Designed as per UN ISO 11119-2